


WATER-INFLATED BARRIERS:

FOR CIVIL CONSTRUCTION COFFERDAMS AND FLOOD MITIGATION

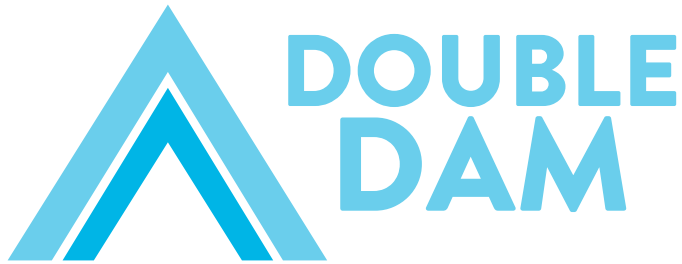

- △ The Double Dam features a single internal stabilizing panel to provide safety and stability for all sizes up to 4' (1.2m) high.
- △ Water-inflated dams are quickly deployed, filled with any available source of water, and are very friendly where environmental impact is a concern.
- △ Double Dams are reusable, provide flexible layout options, do no substrate damage, and are suitable for worksite dewatering and flood protection in waters up to 3' (0.9m) deep.

PART NO.	LENGTH	WIDTH	DRY WEIGHT
DD2450	50'	5'	120lbs
DD3650	50'	7.5'	180lbs
DD4850	50'	10'	230lbs



PHOTOS ON REVERSE



Ark Flood and Dam Resources, 100-3931 Wanuskewin Road, Saskatoon, SK, S7P 0B4, Canada

306.955.3469 | greg@arkfloodanddam.com